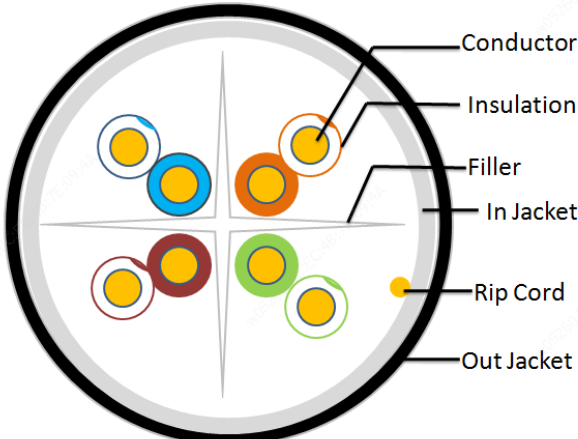
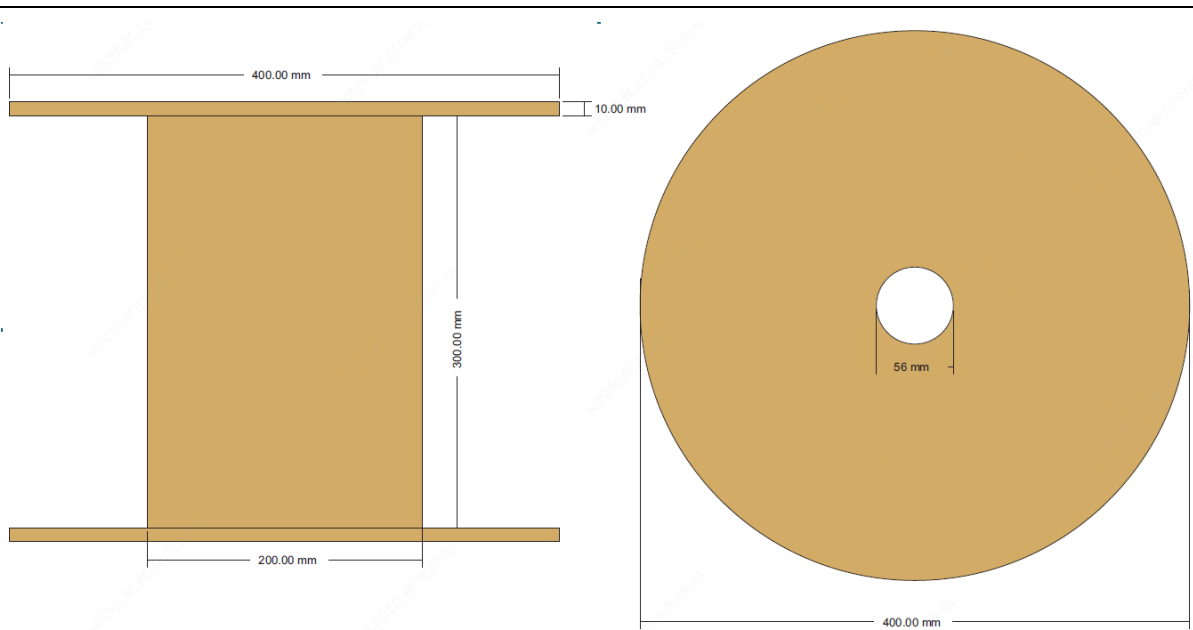


UTP Category 6 Double Jacket Cables

| Content of Data Sheet | | | |
|-----------------------|------------------------------------|--------------------------|--|
| Product model | CAB-LC3110B-E-IN | | |
| Product specification | HSYV-6 4x2x0.52 | |  |
| Test Standard | ISO/IEC11801、TIA-568-C.2、 YD/T1019 | | |
| Conductor | Material | OFC(Oxygen free copper) | |
| | AWG | 24 | |
| | Nom.O.D.(mm) | 0.52±0.03 mm | |
| | DC resistance | ≤95 Ω/km | |
| Insulation | Material | HDPE | |
| | Thickness | 0.2±0.02 mm | |
| | Diameter | 0.93±0.05 mm | |
| | Color | Blue/White- Blue | |
| | | Orange/White-Orange | Brown/White-Brown |
| Pitch | Offset pitch | ≤20 mm | |
| | Cable pitch | ≤120 mm | |
| Sheath | Material(IN Jacket) | PVC(complies RoHS/REACH) | |
| | Material(OUT Jacket) | LDPE | |
| | External O.D. | 6.9±0.3 mm | |
| | Color | Black | |
| | Tensile strength(PVC) | >13.5 Mpa | |
| | Thickness | 0.55±0.05 mm | |
| Surface Printing | Letter height | 3.0±0.3 mm | |
| | Color | White | |
| | Print error & Space | 1±0.005 m | |

| | | | |
|---------------------|--|-------------------|-----|
| | Case number | Yes | |
| Packing | Wooden shaft | | |
| |  | | |
| Packing length | 305±1m | | |
| Rip-cord | Yes | Crossing backbone | Yes |
| Ambient temperature | -20°C ~ 60°C | | |

Zhejiang Uniview Technologies Co.,Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2011-2018 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.