


## SmokeCloak EASY

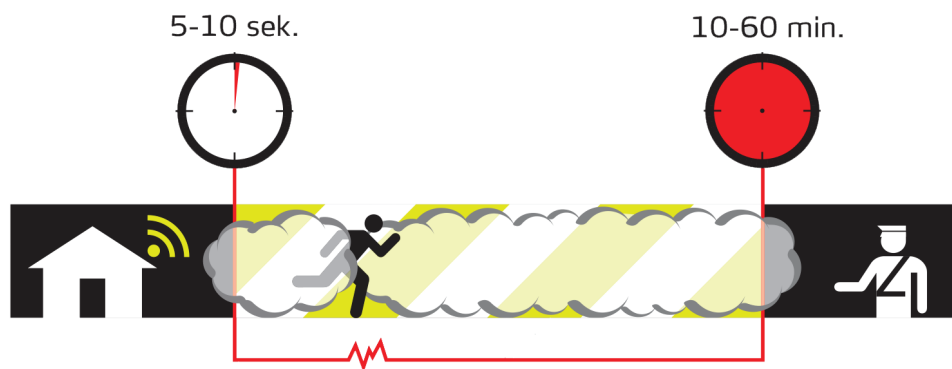

The **SmokeCloak EASY** range is the perfect choice for securing a wide variety of areas, for instance:

- Small rooms with PC-equipment, Server rooms, flat screens, optical equipment, valuable documents etc.
- Local security (point security) - securing a local area in a large room
- High value stores with safes, expensive goods such as perfume, IT-equipment, jewellery, tobacco etc.
- Larger open plan stores/offices
- Anti raid protection in high security environments

## Product features

- Very high output of dense white fog for maximum protection
- Harmless dry vapour with no negative side effects
- The fog hangs up to an hour
- Fluid refill system
- Danish design
- Battery back-up
- Heavy duty sabotage resistant case
- Internal system status LED indicators
- Built-in self diagnostics
- Electronic fluid measurement system
- Output signals for communication with existent alarm system
- Input signals for controlling the SmokeCloak from existing alarm systems



	EASY 600	EASY 1100	EASY 2200
<b>Output</b>	30 sec.: 420 m <sup>3</sup> (210*) 60 sec.: 630 m <sup>3</sup> (315*)	30 sec.: 804 m <sup>3</sup> (402*) 60 sec.: 1284 m <sup>3</sup> (642*)	30 sec.: 1529 m <sup>3</sup> (764*) 60 sec.: 2011 m <sup>3</sup> (1005*)
<b>Tested and approved in accordance with EN 50131-8:</b>	Yes	Yes	Yes
<b>Number of output nozzles</b>	1	2	2 (straight or 30 degree)
<b>Heat up time (ready)</b>	9 min.	9 min.	9 min.
<b>Fluid</b>	1,0 litre fluid refill system	1,0 litre fluid refill system	1,0 litre fluid refill system
<b>Installation weight</b>	10,6 kg	13,4 kg	19.15kg
<b>Dimensions</b>	252 mm wide x 193 mm deep x 418 mm high	327 mm wide x 193 mm deep x 418 mm high	382 mm wide x 223 mm deep x 468 mm high
<b>Reaction time</b>	0,1 seconds	0,1 seconds	0,1 seconds
<b>Pulse Function</b>	Programmable via Dip switch	Programmable via Dip switch	Programmable via PC tool
<b>Electricity</b>	200 - 250V & 110V	200 - 250 V	200 - 250V
<b>Power consumption</b>	1500 watt @ 230 Volt / 1050 watt @ 110 V	2100 watt @ 230 V	1900watt @ 230 Volt
<b>Average power consumption</b>	75W	140W	107W full temp / 72W power save
<b>Colour</b>	white RAL 9016	white RAL 9016	white RAL 9016

\*M3 according to current EU standard EN 50131-8